energetic®
Smarter lighting

Prime LED Batten

Diffused Batten With LED Tube

Battens

- Regular batten complete with LED tubes and diffuser.

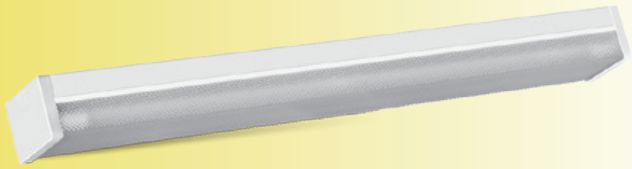

FEATURES

- High efficiency LED T8 tube fitted
- Powder coated steel base
- PMMA diffuser
- Large 6mm terminal block for easy installation
- Safety fuse installed
- Side and top cable entry options
- Fitting colour: White

INCLUDES

- Batten with LED tubes
- Mounting accessories

INSTALLATION OPTIONS

- Surface mounted

APPLICATIONS

- Offices
- Garages
- Stations
- Industrial

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	Ra	DISTRIBUTION	DIMENSIONS(mm)
	IP20	Non dim	Ra≥80	2x16W	L W H

Part No.	Voltage	Watt.	PF	Color Temp.	Lumens	Beam Angle	Lifetime L70B50	Size(L*W*H)mm	Net Weight (kg)
212005A	220-240V	1×9W	0.9	4000K	750lm	110°	40000h	620*68*90	0.94
212006A	220-240V	2×9W	0.9	4000K	1500lm	110°	40000h	620*125*93	1.20
212007A	220-240V	1×16W	0.9	4000K	1500lm	110°	40000h	1230*68*90	1.74
212008A	220-240V	2×16W	0.9	4000K	3000lm	110°	40000h	1230*125*93	2.57
212608A	220-240V	1×9W	0.9	6500K	750lm	110°	40000h	620*68*90	0.94
212609A	220-240V	2×9W	0.9	6500K	1500lm	110°	40000h	620*125*93	1.20
212610A	220-240V	1×16W	0.9	6500K	1500lm	110°	40000h	1230*68*90	1.74
212611A	220-240V	2×16W	0.9	6500K	3000lm	110°	40000h	1230*125*93	2.57

Part No.	Model No.	VEET Status	IPART Status
212005A 212608A	YKTPLB1-1L60	Approved No.: 4389	Approved No.: 24143S20-EAJJJJII
212006A 212609A	YKTPLB1-2L60	Approved No.: 4389	Approved No.: 24143S20-EAJJJJII
212007A 212610A	YKTPLB1-1L120	Approved No.: 4389	Approved No.: 24143S20-EAJJJJII
212008A 212611A	YKTPLB1-2L120	Approved No.: 4389	Approved No.: 24143S20-EAJJJJII

[1] Operating Frequency=50/60Hz;
[2] Operating Temperature:-20 ℃~+50 ℃

Specifications are for reference only and may be changed without prior notification.
Version: V4.0 Date: 15/03/2018