Ark UFO Highbay

Multi-Watt selectable Highbay

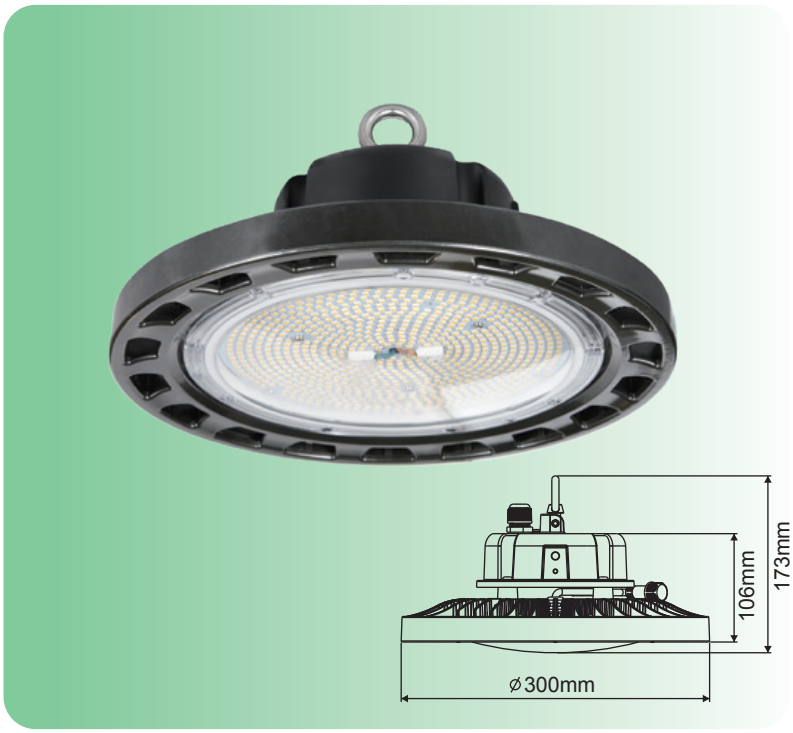

FEATURES

· Multi-watt selectable
· High efficiency SMD chips
· Constant current driver
· Standard beam angle 110° without reflector
· IP65 weatherproof and IK08 rating
· Corrosion free and UV resistant construction
· Plug and play microwave sensor(optional)
· Sensor's remote controller(optional)

DIMMING OPTIONS

- 0-10V dimmable (default)
- DALI dimmable (optional)

INCLUDES

- LED highbay with multi-watt driver
- 1.5 m flex and plug

APPLICATIONS

- Workshops
- Warehouses
- Industrial
- Commercial

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	Ra	DISTRIBUTION	IK RATING
	IP65	0-10V DIM	Ra≥80		IK08 1.7kg at 300mm

Order Code	Part No.	Model No.	Voltage	Watt.[2]	PF	Color Temp.	Lumens	Lumen/W	Beam Angle	Lifetime L70B50	Net Weight (kg)
333334	333334	HBE2-165WMN 165W	220-240V	165W	0.9	4000K	27200lm	165lm/W	110°	50000h	3.57
333335	333335	HBE2-165WMN 165W	220-240V	165W	0.9	5000K	27200lm	165lm/W	110°	50000h	3.57

[1] Operating Frequency=50/60Hz;
[2] Multi-watt description: 165W: 165/125/115/90/80W; 27200/21000/18900/15000/13500lm
[3] Operating Temperature:-30℃~+50℃

Specifications are for reference only and may be changed without prior notification.