energetic®
Smarter lighting

Ark UFO Highbay

Multi-Watt selectable Highbay

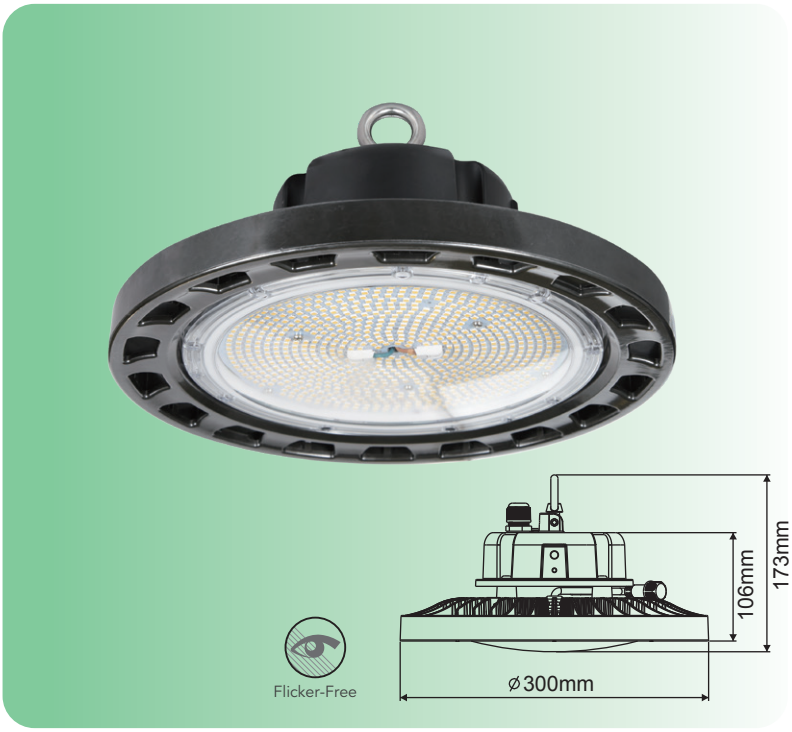

FEATURES

- Multi-watt selectable
- Metal body with excellent heat dissipation
- High efficiency SMD chips
- Constant current driver
- Standard beam angle 110°
- IP65 weatherproof and IK08 rating
- Corrosion free and UV resistant construction

DIMMING OPTIONS

- 0-10V dimmable (default)
- DALI dimmable (optional)

INCLUDES

- LED highbay with Multi-Watt driver
- 1.5 m flex and plug

OPTIONAL ACCESSORIES

- Plug and play microwave sensor (333349)
- Remote control (333359)

APPLICATIONS

- Workshops
- Warehouses
- Industrial
- Commercial

WARRANTY

- Five years (subject to terms and conditions)

CERTIFICATION	IP RATING	DIMMABLE	Ra	DISTRIBUTION	IK RATING
	IP65	0-10V DIM	Ra≥80		IK08 1.7kg at 300mm

Order Code	Part No.	Model No.	Voltage	Watt.[2]	PF	Color Temp.	Lumens	Lumen/W	Beam Angle	Lifetime L70B50	Net Weight (kg)
333334	333334	HBE2-165WMN 165W	220-240V	165W	0.9	4000K	27200lm	165lm/W	110°	50000h	3.57
333335	333335	HBE2-165WMN 165W	220-240V	165W	0.9	5000K	27200lm	165lm/W	110°	50000h	3.57

[1] Multi-Watt Options
[2] 5-IN-1 165/125/115/90/80W @ 165Lm/W
[3] Operating Frequency = 50/60Hz;
[4] Operating Temperature: -30℃~ +50℃

Specifications are for reference only and may be changed without prior notification.